


ETFE Industrial Wall Heat Shrink

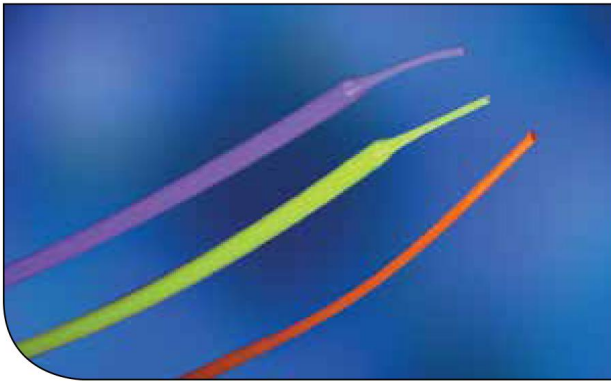

Features

- Superior abrasion resistance
- Greater tensile strength than other heat shrink products
- Self extinguishing

Certifications

- AMS DTL 23053/14A, Class 1

Notes

- Working Temperature: 302°F (150°C)
- Shrink Temperature
347°F (175°C) for 10 minutes
- *Dielectric Strength: $\geq 2,000$ V/M, per ASTM D 149 short term test of 10 MIL thickness (Volts/MIL)
- Heat Shrink tubing is available in stock packaging of 4-ft. straight lengths
- Minimum quantities may apply
- Custom packaging, sizes, lengths and colors are quoted upon request

HS1.5ETFE HEAT SHRINK

Part Number	Size	Mil Spec*	Minimum Expanded I.D.		Maximum Recovered I.D.		Nominal Recovered Wall	
			inch	mm	inch	mm	inch	mm
HS1.5ETFE3/32	3/32	23053/14-001	0.093	2.36	0.062	1.57	0.010 ± 0.003	0.25 ± 0.08
HS1.5ETFE1/8	1/8	23053/14-002	0.125	3.18	0.083	2.11	0.010 ± 0.003	0.25 ± 0.08
HS1.5ETFE3/16	3/16	23053/14-003	0.188	4.78	0.125	3.18	0.011 ± 0.003	0.25 ± 0.08
HS1.5ETFE1/4	1/4	23053/14-004	0.250	6.35	0.166	4.22	0.013 ± 0.003	0.33 ± 0.08
HS1.5ETFE3/8	3/8	23053/14-005	0.375	9.52	0.250	6.35	0.013 ± 0.003	0.33 ± 0.08
HS1.5ETFE1/2	1/2	23053/14-006	0.500	12.7	0.345	8.76	0.013 ± 0.003	0.33 ± 0.08
HS1.5ETFE3/4	3/4	23053/14-007	0.750	19.1	0.500	12.7	0.018 ± 0.004	0.46 ± 0.10
HS1.5ETFE1.00	1	23053/14-008	1.000	25.4	0.665	16.9	0.022 ± 0.004	0.51 ± 0.10
HS1.5ETFE1.25	1-1/4	23053/14-009	1.250	31.8	0.835	21.2	0.030 ± 0.004	0.76 ± 0.10
HS1.5ETFE1.50	1-1/2	23053/14-010	1.500	38.1	1.000	25.4	0.030 ± 0.004	0.76 ± 0.10

